

# Special-Sensors for Automation



## Capacitive Sensors

[www.ege.nt-rt.ru](http://www.ege.nt-rt.ru)

## Contents

**Terminology for capacitive measurements**..... 4.03 - 4.05

### **Capacitive switches and sensors**

Standard switches plastic M12 Series KGK.....	4.07
Standard switches metall M18 Series KGM .....	4.08
Standard switches plastic M18 Series KGK.....	4.09
Standard switches metall M30 Series KGM .....	4.10 - 4.11
Standard switches plastic M30 Series KGK.....	4.12
Smooth-bodied switches Ø 20 mm und Ø 34 mm plastics Series KNK.....	4.13 - 4.15
Long sensing range Series KD / KNK.....	4.16 - 4.17
Special switches PTFE-thread M30 Series KGFW.....	4.18 - 4.19
Special switches PTFE-housing Ø 35 mm Series KNFW .....	4.20
200 °C-High temperature Series KGMT.....	4.21
Analog sensors Series KGA / KDA.....	4.22
Amplifiers for High temperature switches Series KK / KU .....	4.23

### **Capacitive sensors for Ex-applications**

Dust Ex-Sensors Series KGEX / KDEX .....	4.24 - 4.26
Ex-amplifiers Series EGE 903-Ex .....	4.27

### **Accessories**

M12 connector .....	4.28
Fixing agent .....	4.29
Cable.....	4.30

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54
Астана +7(7172)727-132	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31
Белгород (4722)40-23-64	Кемерово (3842)65-04-62	Новосибирск (383)227-86-73	Ставрополь (8652)20-65-13
Брянск (4832)59-03-52	Киров (8332)68-02-04	Орел (4862)44-53-42	Тверь (4822)63-31-35
Владивосток (423)249-28-31	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Томск (3822)98-41-53
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Тула (4872)74-02-29
Вологда (8172)26-41-59	Курск (4712)77-13-04	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Воронеж (473)204-51-73	Липецк (4742)52-20-81	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Екатеринбург (343)384-55-89	Магнитогорск (3519)55-03-13	Рязань (4912)46-61-64	Уфа (347)229-48-12
Иваново (4932)77-34-06	Москва (495)268-04-70	Самара (846)206-03-16	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Мурманск (8152)59-64-93	Санкт-Петербург (812)309-46-40	Череповец (8202)49-02-64
Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Саратов (845)249-38-78	Ярославль (4852)69-52-93

## Terminology for capacitive measurement

### Operating Principal

A capacitive proximity switch works with a high frequency oscillating circuit that creates an electromagnetic field on the active sensor surface by means of a capacitor. When a substantial or fluid substance nears this field a capacitance unbalance occurs and leads to a variation of the amplification in the oscillating circuit. If this amplification exceeds a threshold value, a switching signal is generated.

### Operating Distance

The operating distance is the separation of an object from the active sensor surface at which a switching signal is produced. The operating distance depends on the diameter of the sensor surface. Therefore larger sensors are required for longer operating distances. Many EGE sensors have an adjustable operating distance.

Capacitive proximity switches react to conductive materials and non-conductive materials with a dielectrical constant  $\epsilon > 1$ . The operating distance depends on the material. Constant measurement of different materials against earthed steel ST 37 yields a changed operating distance. The following table lists the approximate values for the material dependent reduction factors. In practical applications there could be variations, because of the mounting conditions, for example.

Material	$\epsilon$	Operating distance in % (approx.)
Steel ST 37	Conductive	100
Saltwater	80	100
Marble	8	65
Porcelain	4-5	50
PE	2.3	10
Oil	2.2	10
Wood	2-7	10-60

The water content of an object or a liquid has a decisive influence on the operating distance. A high humidity content increases the operating distance considerably.

If the proximity switch is moistened with conductive materials, its function can be impaired when a conductive film builds up that electrically connects the sensor electrode with a metallic conducting side. Capacitive proximity switches can detect filling products right through non-electrically conducting container sides. The filler will certainly be detected if its dielectric constant is at least as large as that of the container sides.

### Rated operating distance $s_n$

The rated operating distance is a device parameter that does not take into account sample variances and external influences such as temperature and supply voltages.

### Effective operating distance $s_r$

The effective operating distance is the operating distance at nominal voltage and at nominal temperature of 23 °C. It is between 90% and 110% of the nominal switching distance.

### Usable operating distance $s_u$

The usable operating distance is in the entire allowable temperature and voltage range is between 80% and 120% of the real operating distance.

### Assured operating distance $s_a$

The assured operating distance takes into account all the external influences and sample variances and is in the range from 0% to 72% of the service usable distance. Within this range a guaranteed switching is ensured.

### Switch point drift

The operating distances are given for an ambient temperature of 23 °C. In the permissible temperature range the operating distance varies by less than 15 % from the value at 23 °C. The temperature of the measured object has no influence on the switch point.

### Hysteresis $H$

The switching hysteresis describes the distance between the turn on point while approaching an object and the turn off point during the separation of it from the sensor. The hysteresis brings about a stable switching signal even when there are vibrations, temperature drift, or electrical failures. The hysteresis is defined according to EN 60947-5-2 to be a maximum 20% from the real operating distance, and carries a value of typically 10% from the real operating distance  $s_r$  for EGE sensors.

### Repeating accuracy $R$

The repeating accuracy describes the maintenance of the switching point after the repeated approach of an object under specified circumstances. EGE sensors have typical tolerances of less than 3% of the real operating distance.

### Switching frequency

The maximum switching frequency of the sensor is determined at half nominal operating distance  $s_n$  with standard measurement plates ST 37 according to EN 60947-5-2.

## Terminology for capacitive measurement

### Supply voltage

The operating voltage is the voltage range in which EGE sensors function safely. For a constant voltage supply it is important to make sure that the limits are still observed when the residual ripple is included.

### Switching current

This current gives the maximum long-term current for the switching output of the sensor at an ambient temperature of 25 °C and ohmic load. At an elevated ambient temperature, the current load capability decreases.

For analog outputs, the boundary values given in the appropriate technical data, and particularly the permissible values for resistance loads, must be observed.

### Short circuit protection

The short circuit proof ensures the sensor against destruction through a short circuit on the output. After removal of the fault, the output is reactivated. Where a maximum overload current is listed, this should not be exceeded.

### Overcurrent release

This value indicates the median value of current at which the short circuit protection responds with a tolerance of  $\pm 20\%$ .

### Reverse polarity protection

The reverse polarity protection prevents destruction of the sensor by a reversal of the polarity of the voltage supply.

### Voltage drop $U_d$

The voltage drop arises at the internal resistance of semiconductor elements, which are in the current-path of the output. It is dependent of the load-current and is declared according to EN 60947-5-2 for a mean current of 50 mA.

### Residual current $I_r$

The residual current flows in the load current circuit when the output is blocked. The residual current must be considered when switching sensors in parallel.

### Minimum load current $I_m$

The minimum load current is necessary for flawless operation with two-wire devices.

### Current consumption

The current consumption is the maximum value of the no-load current  $I_0$  that the sensor can absorb without a load.

### Ambient temperature

The ambient temperature indicates the maximum allowable temperature range for the sensor.

### Electromagnetic compatibility EMC

The EMC class is a measure of the noise immunity of the sensor against external electrical and magnetic influences. The information is based on the standard EN 61000-6-2.

### Switch-on impulse suppression

EGE sensors have a switch-on impulse suppression that blocks the output during the switch-on phase, when the operational voltage is applied.

### Protection

The protective system indicates the protection of the sensors against penetration of foreign bodies and water according to EN 60529.

### LED-Display

EGE sensors with yellow light-emitting diodes indicate the switching status optically.

### Housing material

The housing material determines the chemical resistance of the sensor against external influences. For special applications, other housing materials are available.


### Connection

The connection of the sensors is accomplished through plug-in connections or cables. Different cable types and lengths are available upon request.

## Instructions for mounting

### Mounting

For flush mounting the sensor can be built into metal up to its active surface without changing its characteristics. For non-flush mounting a metal-free zone around the sensor must be allowed for. A free zone to the material opposite the sensor must be maintained for all sensors.

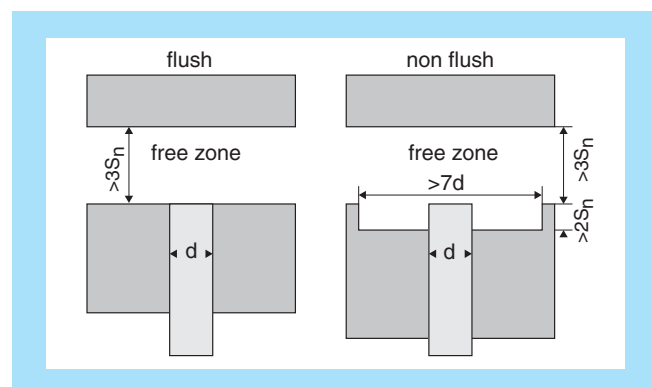

The indicated free zones are in accordance with the standard EN 60947-5-2.

For mounting clamps see page 4.29.

## Terminology for capacitive measurement

### Collocation

When collocating the sensors, a minimum separation must be kept between the devices in order to avoid mutual influence. When in doubt, a test should be conducted under application conditions. For flush mounting the lateral separation between two sensors must correspond to at least the diameter of the sensor. For non flush mounting, the lateral separation from each other must correspond to at least twice the diameter of the sensor. For separations greater than eight times the diameter no mutual influence is to be expected. For oppositely mounted sensors, a minimal separation of eight times the nominal switching distance should be allowed.

### Torques

In order to prevent destruction of the threaded bushing during fitting, the following maximum torques must not be exceeded:

Design	Metal Housing	Plastic Housing
M12x1	10 Nm	1 Nm
M18x1	25 Nm	2 Nm
M30x1.5	40 Nm	5 Nm

PTFE sensors may only be tightened by hand.

## Instructions for operation

### Serial connection

For the serial connection of two wire or three wire sensors the individual voltage drops are added together. Therefore there is a lesser operational voltage at the disposal of the load. The addition of the switch-on delay times should be noted.

### Parallel connection

The parallel connection of two wire sensors can only be conditionally recommended since the residual currents are added together and flow through the load. For the parallel connection of three wire sensors, the current consumption of the individual devices is added together. Since this current does not flow through the load, the maximum number of parallel connectable three wire sensors depends only on the power supply.

## Approval for safety applications

Sensors for personal security must have a qualification approval according to EN 954-1 and must be labeled accordingly. Sensors that are not labeled must not be used for applications of this kind.

### Valid standards:

- EN 60947-5-2  
Control units; low voltage control units, auxiliary switch, proximity switch
- EN 61000-6-4  
Electromagnetic compatibility (EMC)  
Interference emissions in the industrial area
- EN 61000-6-2  
Electromagnetic compatibility (EMC)  
Generic standards immunity for industrial environments
- EN 61000-4-2 (ESD)  
Electrostatic discharging immunity
- EN 61000-4-3 (HF radiated)  
Radiated radio-frequency electromagnetic field immunity test
- EN 61000-4-4 (Burst)  
Electrical fast transient / burst immunity test
- EN 60529  
Protective systems, IP-designation
- EN 60079-0 : 2012  
Explosive atmospheres –  
Part 0: Equipment – General requirements
- EN 60079-11 : 2012  
Explosive atmospheres –  
Part 11: Equipment protection by intrinsic safety "i"
- EN 60079-18 : 2009  
Explosive atmospheres –  
Part 18: Equipment protection by encapsulation "m"

## Authorisations

TÜV NORD CERT Zertifizierungsstelle - Deutschland  
(technical monitoring certification agency - Germany)

## Certification







- TÜV NORD CERT ISO 9001
- TÜV NORD CERT Quality control production  
Attachment IV of the EC-Guidelines  
94/9/EG
- TÜV Nord Re-cancelling certificate according to  
EN 10204

## Standard switches

**Series KGK**  
**Plastic-thread**  
**M12x1**

**DC 10...33 V**

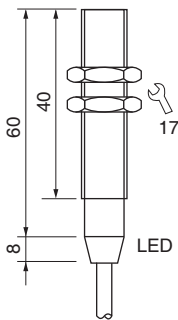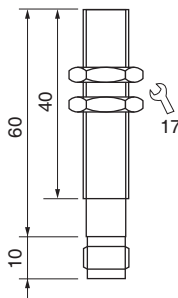

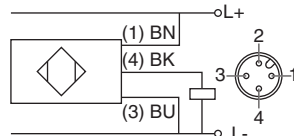Design	DC PNP • M12x1	DC PNP • M12x1
Dimensions		
Installation flush (f) non flush (nf)	LED	
Operating distance sn [mm]	2 nf	2 nf
Switching output		
ID-No.	P41300	P41303
Type	KGK 002 GSP	KGKU 002 GSP
Supply voltage [V]	10...33 DC	10...33 DC
Switching current [mA]	400	400
Short circuit proof	•	•
Overcurrent release [mA]	800	800
Reverse protection	•	•
Voltage drop max. [V]	1.5	1.5
Residual current [mA]	0.2	0.2
Current consumption (not actuated) [mA]	4	4
Switching frequency [Hz]	25	25
Ambient temperature [°C]	-25...+70	-25...+70
EMC-class	A	A
Protection [EN 60529]	IP 67	IP 67
LED display	•	•
Housing material	PPO	PPO
Connection	2 m PVC-cable 3x0.34 mm <sup>2</sup>	M12 connector
Connection diagram		
Accessories (see page 4.28)	Fixing nuts are part of delivery	











## Standard switches

**Series KGM**  
**Metal-thread**  
**M18x1**

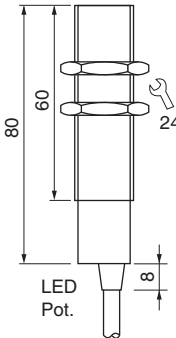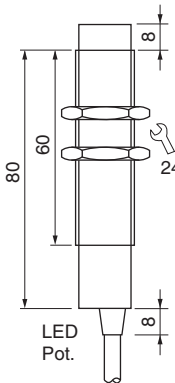**DC 10...55 V**











Design	DC PNP • M18x1		DC PNP • M18x1	
Dimensions				
Installation flush (f) non flush (nb)	f		nb	
Operating distance sn [mm] (Adjustable range)	5 f (1...7)	5 f (1...7)	8 nf (1...10)	8 nf (1...10)
Switching output				
ID-No.	P41001	P41002	P41009	P41010
Type	KGM 005 GSP	KGM 005 GOP	KGM 007 GSP	KGM 007 GOP
Supply voltage [V]	10...55 DC	10...55 DC	10...55 DC	10...55 DC
Switching current [mA]	400	400	400	400
Short circuit proof	•	•	•	•
Overcurrent release [mA]	800	800	800	800
Reverse protection	•	•	•	•
Voltage drop max. [V]	1.5	1.5	1.5	1.5
Residual current [mA]	0.2	0.2	0.2	0.2
Current consumption (not actuated) [mA]	4	12	4	12
Switching frequency [Hz]	25	25	25	25
Ambient temperature [°C]	-25...+70	-25...+70	-25...+70	-25...+70
EMC-class	A	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67	IP 67
LED display	•	•	•	•
Housing material	Br-Ni / PPO	Br-Ni / PPO	Br-Ni / PPO	Br-Ni / PPO
Connection	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>
Connection diagram				
Accessories (see page 4.29)	fixing nuts are part of delivery			

## Standard switches

**Series KGK**  
**Plastic-thread**  
**M18x1**

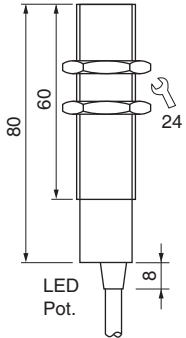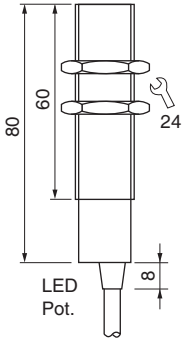**DC 10...55 V**



Design	DC PNP • M18x1	DC PNP • M18x1
Dimensions		
Installation flush (f) non flush (nf)		
Operating distance sn [mm] (Adjustable range)	8 nf (1...10)	8 nf (1...10)
Switching output		
ID-No.	<b>P41017</b>	<b>P41018</b>
Type	KGK 007 GSP	KGK 007 GOP
Supply voltage [V]	10...55 DC	10...55 DC
Switching current [mA]	400	400
Short circuit proof	•	•
Overcurrent release [mA]	800	800
Reverse protection	•	•
Voltage drop max. [V]	1.5	1.5
Residual current [mA]	0.2	0.2
Current consumption (not actuated) [mA]	4	12
Switching frequency [Hz]	25	25
Ambient temperature [°C]	-25...+70	-25...+70
EMC-class	A	A
Protection [EN 60529]	IP 67	IP 67
LED display	•	•
Housing material	PPO	PPO
Connection	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>
Connection diagram		
Accessories (see page 4.29)	Fixing nuts are part of delivery	











## Standard switches

**Series KGM**  
**Metal-thread**  
**M30x1.5**

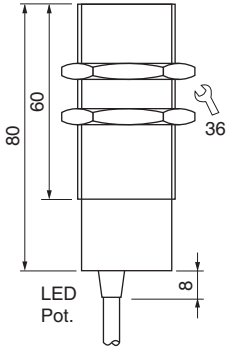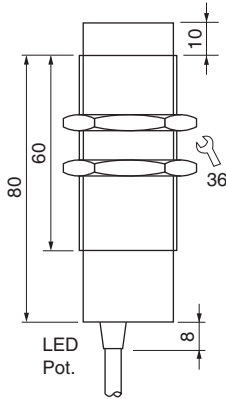**DC 10...55 V**











Design	DC PNP • M30x1.5		DC PNP • M30x1.5	
Dimensions				
Installation flush (f) non flush (nf)				
Operating distance sn [mm] (Adjustable range)	10 f (3...15)	10 f (3...15)	15 nf (3...20)	15 nf (3...20)
Switching output				
ID-No.	P40072	P40073	P40076	P40077
Type	KGM 012 GSP	KGM 012 GOP	KGM 015 GSP	KGM 015 GOP
Supply voltage [V]	10...55 DC	10...55 DC	10...55 DC	10...55 DC
Switching current [mA]	400	400	400	400
Short circuit proof	•	•	•	•
Overcurrent release [mA]	800	800	800	800
Reverse protection	•	•	•	•
Voltage drop max. [V]	1.5	1.5	1.5	1.5
Residual current [mA]	0.2	0.2	0.2	0.2
Current consumption (not actuated) [mA]	4	12	4	12
Switching frequency [Hz]	25	25	25	25
Ambient temperature [°C]	-25...+70	-25...+70	-25...+70	-25...+70
EMC-class	A	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67	IP 67
LED display	•	•	•	•
Housing material	Br-Ni / PPO	Br-Ni / PPO	Br-Ni / PPO	Br-Ni / PPO
Connection	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>
Connection diagram				
Accessories (see page 4.29)	Fixing nuts are part of delivery			

## Standard switches

**Series KGM**  
**Metal-thread**  
**M30x1.5**

**AC 20...250 V**

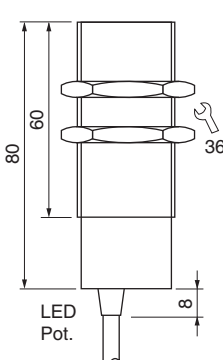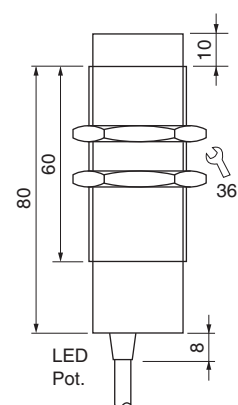

Design	AC • M30x1.5		AC • M30x1.5	
<b>Dimensions</b>				
Installation flush (f) non flush (nf)				
Operating distance sn [mm] (Adjustable range)	10 f (3...15)	10 f (3...15)	15 nf (3...20)	15 nf (3...20)
Switching output				
ID-No.	P40007	P40008	P40009	P40010
Type	KGM 012 WS	KGM 012 WO	KGM 015 WS	KGM 015 WO
Supply voltage [V]	20...250 AC	20...250 AC	20...250 AC	20...250 AC
Switching current at 25 °C. AC 12 [mA]	400	400	400	400
Short circuit proof	3000 mA/10 ms	3000 mA/10 ms	3000 mA/10 ms	3000 mA/10 ms
Overcurrent release [mA]	-	-	-	-
Reverse protection	-	-	-	-
Voltage max. [V]	10	10	10	10
Minimum load current [mA]	5	5	5	5
Current consumption max. [mA]	2.5	2.5	2.5	2.5
Switching frequency [Hz]	15	15	15	15
Ambient temperature [°C]	-25...+70	-25...+70	-25...+70	-25...+70
EMC-class	A	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67	IP 67
LED display	•	•	•	•
Housing material	Br-Ni / PPO	Br-Ni / PPO	Br-Ni / PPO	Br-Ni / PPO
Connectiob	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>
Connection diagram				

Accessories (see page 4.29)









Fixing nuts are part of delivery

## Standard switches

**Series KGK**  
**Plastic-thread**  
**M30x1.5**

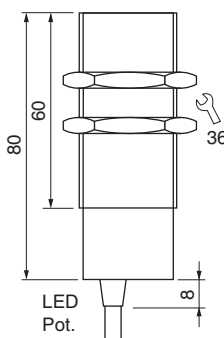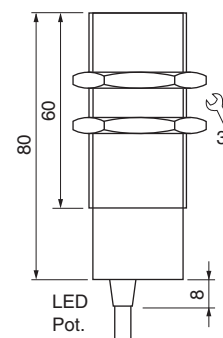**DC 10...55 V**  
**AC 20...250 V**







Design	DC PNP • M30x1.5		AC • M30x1.5	
Dimensions				
Installation flush (f) non flush (nf)				
Operating distance sn [mm] (Adjustable range)	15 nf (3...20)	15 nf (3...20)	15 nf (3...20)	15 nf (3...20)
Switching output				
ID-No.	P40080	P40081	P40011	P40012
Type	KGK 015 GSP	KGK 015 GOP	KGK 015 WS	KGK 015 WO
Supply voltage [V]	10...55 DC	10...55 DC	20...250 AC	20...250 AC
Switching current at 25 °C. AC 12 [mA]	400	400	400	400
Short circuit proof	•	•	3000 mA/10 ms	3000 mA/10 ms
Overcurrent release [mA]	800	800	-	-
Reverse protection	•	•	-	-
Voltage drop max. [V]	1.5	1.5	10	10
Minimum load current [mA]	0.2	0.2	4	12
Current consumption (not actuated) [mA]	4	12	2.5	2.5
Switching frequency [Hz]	25	25	15	15
Ambient temperature [°C]	-25...+70	-25...+70	-25...+70	-25...+70
EMC-class	A	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67	IP 67
LED display	•	•	•	•
Housing material	PPO	PPO	PPO	PPO
Connection	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 2x0.5 mm <sup>2</sup>	2 m PVC-cable 2x0.5 mm <sup>2</sup>
Connection diagram				
Accessories (see page 4.29)	Fixing nuts are part of delivery			

## Standard switches

**Series KNK**  
**Plastic-thread**  
**Ø 20 mm**

**DC 10...55 V**



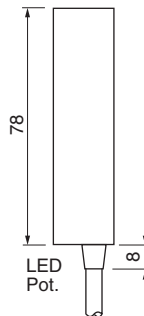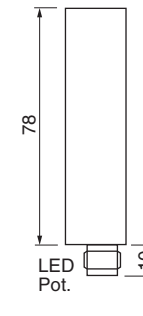
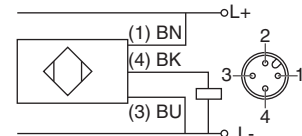






Design	DC PNP • Ø 20 mm		DC PNP • Ø 20 mm	
Dimensions				
Installation flush (f) non flush (nf)				
Operating distance sn [mm] (Adjustable range)	10 nf (1...15)	10 nf (1...15)	10 nf (1...15)	10 nf (1...15)
Switching output				
ID-No.	P40092	P40093	P41208	P41209
Type	KNK 015 GSP	KNK 015 GOP	KNKU 015 GSP	KNKU 015 GOP
Supply voltage [V]	10...55 DC	10...55 DC	10...55 DC	10...55 DC
Switching current [mA]	400	400	400	400
Short circuit proof	•	•	•	•
Overcurrent release [mA]	800	800	800	800
Reverse protection	•	•	•	•
Voltage drop max. [V]	1.5	1.5	1.5	1.5
Residual current [mA]	0.2	0.2	0.2	0.2
Current consumption (not actuated) [mA]	4	12	4	12
Switching frequency [Hz]	25	25	25	25
Ambient temperature [°C]	-25...+70	-25...+70	-25...+70	-25...+70
EMC-class	A	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67	IP 67
LED display	•	•	•	•
Housing material	PBT	PBT	PBT	PBT
Connection	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>	M12 connector	M12 connector
Connection diagram				
Accessories (see page 4.28)	Mounting clamps Ø 20 mm (Z00100) are part of delivery			

## Standard switches

**Series KNK**  
**Smooth-body switches**  
**Ø 34 mm**

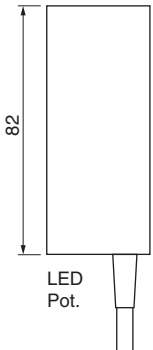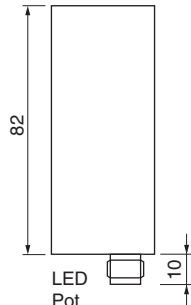**DC 10...55 V**

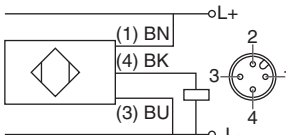

Design	DC PNP • Ø 34 mm		DC PNP • Ø 34 mm	
Dimensions				
Installation flush (f) non flush (nf)				
Operating distance sn [mm] (Adjustable range)	20 nf (1...30)	20 nf (1...30)	20 nf (1...30)	20 nf (1...30)
Switching output				
ID-No.	<b>P40096</b>	<b>P40097</b>	<b>P41220</b>	<b>P41221</b>
Type	KNK 025 GSP	KNK 025 GOP	KNKU 025 GSP	KNKU 025 GOP
Supply voltage [V]	10...55 DC	10...55 DC	10...55 DC	10...55 DC
Switching current [mA]	400	400	400	400
Short circuit proof	•	•	•	•
Overcurrent release [mA]	800	800	800	800
Reverse protection	•	•	•	•
Voltage drop max. [V]	1.5	1.5	1.5	1.5
Residual current [mA]	0.2	0.2	0.2	0.2
Current consumption (not actuated) [mA]	4	12	4	12
Switching frequency [Hz]	25	25	25	25
Ambient temperature [°C]	-25...+70	-25...+70	-25...+70	-25...+70
EMC-class	A	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67	IP 67
LED display	•	•	•	•
Housing material	PBT	PBT	PBT	PBT
Connection	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>	M12 connector	M12 connector
Connection diagram				
Accessories (see page 4.28)	Mounting clamps Ø 34 mm (Z00102) are part of delivery			

## Standard switches

### Series KNK









#### Smooth-body switches

Ø 20 mm

Ø 34 mm

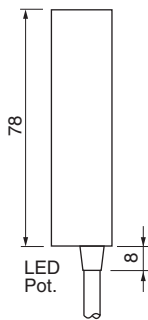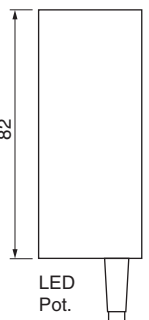AC 20...250 V



Design	AC • Ø 20 mm		AC • Ø 34 mm	
Dimensions				
Installation flush (f) non flush (nf)				
Operating distance sn [mm] (Adjustable range)	10 nf (1...15)	10 nf (1...15)	20 nf (1...30)	20 nf (1...30)
Switching output				
ID-No.	P40017	P40018	P40019	P40020
Type	KNK 015 WS	KNK 015 WO	KNK 025 WS	KNK 025 WO
Supply voltage [V]	20...250 AC	20...250 AC	20...250 AC	20...250 AC
Switching current [mA]	400	400	400	400
Short circuit proof	3000 mA/10 ms	3000 mA/10 ms	3000 mA/10 ms	3000 mA/10 ms
Overcurrent release [mA]	-	-	-	-
Reverse protection	-	-	-	-
Voltage drop max. [V]	10	10	10	10
Minimum load current [mA]	5	5	5	5
Current consumption max. [mA]	2.5	2.5	2.5	2.5
Switching frequency [Hz]	15	15	15	15
Ambient temperature [°C]	-25...+70	-25...+70	-25...+70	-25...+70
EMC-class	A	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67	IP 67
LED display	•	•	•	•
Housing material	PBT	PBT	PBT	PBT
Connection	2 m PVC-cable 2x0.5 mm <sup>2</sup>	2 m PVC-cable 2x0.5 mm <sup>2</sup>	2 m PVC-cable 2x0.5 mm <sup>2</sup>	2 m PVC-cable 2x0.5 mm <sup>2</sup>
Connection diagram				

Accessories (see page 4.29)









Mounting clamps Ø 20 mm (Z00100) bzw. Ø 34 mm (Z00102) are part of delivery

## Long sensing range

**Series KD**  
**Plastic-housing**  
**Ø 80 mm**

**DC 10...55 V**  
**AC 20...250 V**

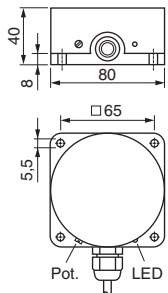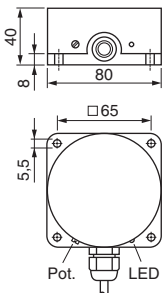

Design	DC PNP • Ø 80 mm	AC • Ø 80 mm
Dimensions		
Installation flush (f) non flush (nf)		
Operating distance sn [mm] (Adjustable range)	55 nf (1...70)	55 nf (1...70)
Switching output		
ID-No.	P40100	P40021
Type	KD 080 GSP	KD 080 WS
Supply voltage [V]	10...55 DC	20...250 AC
Switching current [mA]	400	400
Short circuit proof	•	3000 mA/10 ms
Overcurrent release [mA]	800	-
Reverse protection	•	-
Voltage drop [V]	1.5	10
Residual current [mA]	0.2	-
Minimum load current [mA]	-	5
Current consumption [mA]	4 (not actuated)	2,5
Switching frequency [Hz]	10	10
Ambient temperature [°C]	-25...+70	-25...+70
EMC-class	A	A
Protection [EN 60529]	IP 67	IP 67
LED display	•	•
Housing material	PBT	PBT
Connection	2 m PVC-cable 3x0.5 mm <sup>2</sup> (PG plug connection)	2 m PVC-cable 2x0.5 mm <sup>2</sup> (PG plug connection)
Connection diagram		
Accessories	see page 4.30	



## Long sensing range

**Series KNK**  
**Plastic-housing**  
**Ø 100 mm**

**DC 10...55 V**  
**AC 20...250 V**



Design	DC PNP • Ø 100 mm	AC • Ø 100 mm
<b>Dimensions</b>  Installation flush (f) non flush (nf)		
Operating distance sn [mm] (Adjustable range)	70 nf (1...120)	70 nf (1...120)
Switching output		
ID-No.	P40105	P40023
Type	KNK 090 GSP	KNK 090 WS
Supply voltage [V]	10...55 DC	20...250 AC
Switching current [mA]	400	400
Short circuit proof	•	3000 mA/10 ms
Overcurrent release [mA]	800	-
Reverse protection	•	-
Voltage drop [V]	1.5	10
Residual current [mA]	0.2	-
Minimum load current [mA]	-	5
Current consumption [mA]	4 (not actuated)	2.5
Switching frequency [Hz]	10	10
Ambient temperature [°C]	-25...+70	-25...+70
EMC-class	A	A
Protection [EN 60529]	IP 67	IP 67
LED display	•	•
Housing material	PBT	PBT
Connection	2 m PVC-cable 3x0.5 mm <sup>2</sup> (PG plug connection)	2 m PVC-cable 2x0.5 mm <sup>2</sup> (PG plug connection)
Connection diagram		
Accessories	see page 4.29	









## All-PTFE-housing

**Series KGFW**  
**PTFE-housing**  
**M30x1.5**

**DC 10...55 V**

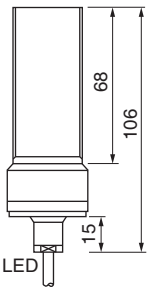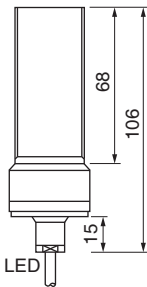**Suitable for use in the food industry**  
**Chemical resistant**



Design	DC PNP • M30x1.5		DC PNP • M30x1.5	
Dimensions				
Installation flush (f) non flush (nf)				
Operating distance sn [mm]	10 f	10 f	14 nf	14 nf
Switching output				
ID-No.	P41268	P41269	P41280	P41281
Type	KGFW 010 GSP	KGFW 010 GOP	KGFW 015 GSP	KGFW 015 GOP
Supply voltage [V]	10...55 DC	10...55 DC	10...55 DC	10...55 DC
Switching current [mA]	400	400	400	400
Short circuit proof	•	•	•	•
Overcurrent release [mA]	800	800	800	800
Reverse protection	•	•	•	•
Voltage drop max. [V]	1.5	1.5	1.5	1.5
Residual current [mA]	0.2	0.2	0.2	0.2
Current consumption (not actuated) [mA]	4	12	4	12
Switching frequency [Hz]	25	25	25	25
Ambient temperature [°C]	-25...+90	-25...+90	-25...+90	-25...+90
EMC-class	A	A	A	A
Protection [EN 60529]	IP 68	IP 68	IP 68	IP 68
LED display	•	•	•	•
Housing material	PTFE / PVDF	PTFE / PVDF	PTFE / PVDF	PTFE / PVDF
Connection	2 m FEP-cable 3x0.34 mm <sup>2</sup>	2 m FEP-cable 3x0.34 mm <sup>2</sup>	2 m FEP-cable 3x0.34 mm <sup>2</sup>	2 m FEP-cable 3x0.34 mm <sup>2</sup>
Connection diagram				
Accessories (see page 4.29)	Fixing nuts PTFE (Z00120) are not part of delivery			






## All-PTFE-housing

**Series KGFW**  
**PTFE-housing**  
**M30x1.5**

**DC 10...55 V**

**Suitable for use in the food industry**  
**Chemical resistant**

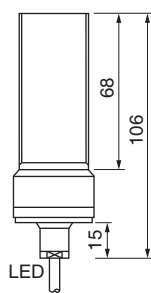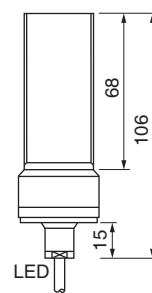








Design	AC • M30x1,5	AC • M30x1,5
Dimensions		
Installation flush (f) non flush (nf)		
Operating distance sn [mm]	10 f	14 nf
Switching output		
ID-No.	P41266	P41278
Type	KGFW 010 WS	KGFW 015 WS
Supply voltage [V]	20...250 AC	20...250 AC
Switching current [mA]	400	400
Short circuit proof	3000 mA/10 ms	3000 mA/10 ms
Overcurrent release [mA]	-	-
Reverse protection	-	-
Voltage drop [V]	10	10
Minimum load current [mA]	5	5
Current consumption [mA]	2.5	2.5
Switching frequency [Hz]	15	15
Ambient temperature [°C]	-25...+90	-25...+90
EMC-class	A	A
Protection [EN 60529]	IP 68	IP 68
LED display	•	•
Housing material	PTFE / PVDF	PTFE / PVDF
Connection	2 m Silicone-cable 2x0.75 mm <sup>2</sup>	2 m Silicone-cable 2x0.75 mm <sup>2</sup>
Connection diagram		
Accessories (see page 4.29)	Fixing nuts PTFE (Z00120) are not part of delivery	

## All-PTFE-housing

**Series KNFW**  
**PTFE-housing**  
**Ø 35 mm**

**DC 10...55 V**  
**AC 20...250 V**

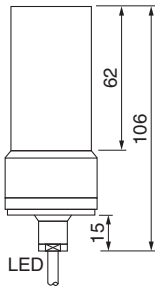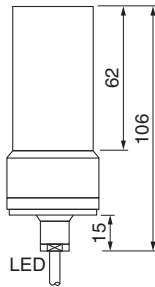

Design	DC PNP • Ø 35 mm		AC • Ø 35 mm
Dimensions			
Installation flush (f) non flush (nf)			
Operating distance sn [mm]	20 nf		20 nf
Switching output			
ID-No.	P41292	P41293	P41290
Type	KNFW 020 GSP	KNFW 020 GOP	KNFW 020 WS
Supply voltage [V]	10...55 DC	10...55 DC	20...250 AC
Switching current [mA]	400	400	400
Short circuit proof	•	•	3000 mA/10 ms
Overcurrent release [mA]	800	800	-
Reverse protection	•	•	-
Voltage drop max. [V]	1.5	1.5	10
Residual current [mA]	0.2	0.2	-
Minimum load current [mA]	-	-	5
Current consumption (not actuated) [mA]	4	12	2.5
Switching frequency [Hz]	10	10	10
Ambient temperature [°C]	-25...+90	-25...+90	-25...+70
EMC-class	A	A	A
Protection [EN 60529]	IP 68	IP 68	IP 68
LED display	•	•	•
Housing material	PTFE / PVDF	PTFE / PVDF	PTFE / PVDF
Connection	2 m FEP-cable 3x0.34 mm <sup>2</sup>	2 m FEP-cable 3x0.34 mm <sup>2</sup>	2 m Silicone-cable 2x0.75 mm <sup>2</sup>
Connection diagram			
Accessories (see page 4.29)	Mounting clamps PTFE (Z00125) are not part of delivery		

# Capacitive Sensors



## 200 °C – High temperature

**Series KGMT**  
**Proximity switch for high temperature**

**Temperature range –40...+200 °C**  
**Level detection**  
**Dry run protection**  
**PTFE sensor-tip, stainless steel housing**



Design	M18x1	M30x1.5
Dimensions		
Installation flush (f) non flush (nf)		
Operating distance sn [mm]	5 nf	10 nf
Amplifier	KK 030... KU 120...	KK 030... KU 120...
ID-No.	P41301	P41302
Type	KGMT 05 S-200	KGMT 10 S-200
Hysteresis [%]	approx. 10	approx. 10
Temperature range sensor [°C]	–40...+200	–40...+200
Temperature range cable [°C]	–40...+200	–40...+200
Compressive strength [bar]	2	2
Protection [EN 60529] Sensor	IP 67	IP 67
Protection [EN 60529] plug	IP 54	IP 54
Housing material	AISI 316 Ti / PTFE	AISI 316 Ti / PTFE
Connection	2 m PTFE-cable LEM 01 plug system	2 m PTFE-cable LEM 01 plug system
LEM plug system		
Cable plug housing LEM 01		
Accessories	Amplifiers see page 4.23	






## Analog sensors

### Series KGA / KDA Metal thread

**M30x1.5**  
**Ø 80 mm**

**4...20 mA**

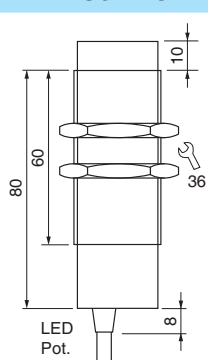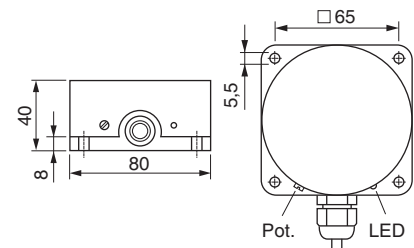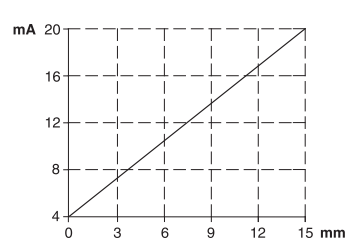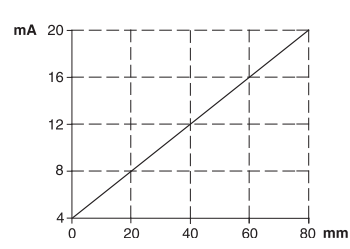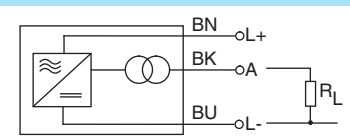

Design	M30x1.5	Ø 80 mm
Dimensions		
Installation flush (f) non flush (nf)		
Analog range [mm]	0...15 nf	0...80 nf
ID-No.	P41309	P41310
Type	KGA 015 GI	KDA 080 GI
Supply voltage [V]	18...27 DC	18...27 DC
Current consumption max. [mA]	40	40
Output current max. [mA]	23	23
Linearity deviation [% of scale]	±10	±10
Load resistance RL [kΩ]	<0.4	<0.4
Ambient temperature [°C]	-25...+70	-25...+70
Temperature deviation max. [% of scale]	10	10
Protection [EN 60529]	IP 67	IP 67
Housing material	Br-Ni / PPO	PBT
Connection	2 m PVC-cable 3x0.5 mm <sup>2</sup>	2 m PVC-cable 3x0.5 mm <sup>2</sup>
Output signal		
Connection diagram		
Accessories	Fixing nuts are part of delivery	

## Amplifiers

### Series KK-KU

For sensors  
up to +230 °C

IP 67 protection

LED display



Design	KK 030...		KU 120...	
Dimensions				
Sensing point sp	adjustable		adjustable	
Switching output				
ID-No.	P21095		P21107	P21118
Type	KK 030 GSP		KU 120 GPP-24	KU 120 WP-230
Supply voltage [V]	16...55 DC		24 DC ±20%	230 AC ±10%
Current consumption [mA]	15			50
Switching current max. [mA]	200			400
Hysteresis [%]	10			10 (adjustable)
Switching frequency [Hz]	15			5
Ambient temperature [°C]	-5...+60			-20...+60
EMC-class	A			A
Protection [EN 60529]	IP 67			IP 65
housing connection	IP 54			IP 54
Function indicator	LED yellow			LED array
Stand-by indicator	LED green			•
Housing material	AISI 316 Ti			Aluminium
Sensor connection	LEM 01 plug			LEM 01 plug
Connection	M12 connector		M12 connector	2 m PVC-cable 4x0.75 mm <sup>2</sup>
Connection diagram				
Accessories	Connecting cable SLG 3... or SLW 3... see page 4.28			



# Capacitive Sensors



## Dust - $\text{Ex}$ Intrinsically safe • Zone 20

### Series KGEX - Level controller

Category 1  
Dust  $\text{Ex}$  Zone 20

Proximity sensors  
Level sensors



Design	M18x1	M30x1.5	G1	G3/4
<b>Dimensions</b>  Installation flush (f) non flush (nf)				
Operating distance sn [mm]	8 nf	10 nf	-10	-5
ID-No.	P21157	P21158	P21159	P21160
Type	KGEX 018	KGEX 030	KGEX 100	KGEX 107
Ambient temperature [°C]	-25...+75			
Ex marking	II 1D Ex ia IIIC T 95 °C Da IP 67			
Certificate No.	TÜV 03 ATEX 2046			
Maximum values	Ci = negligibly small Li = negligibly small Ii = 80 mA Ui = 12.6 V Pi = 252 mW			
Only for the connection to certified intrinsically safe circuits with the following maximum values:				
Housing material	PVDF	PTFE	PTFE	PTFE / AISI 316 Ti FPM
Protection [EN 60529]	IP 67			
Connection	2 m PVC-cable 3x0.5 mm <sup>2</sup>			
For the connection to amplifiers EGE 903 Ex...				
Note	Fixing nuts are part of delivery			


# Capacitive Sensors



## Dust - $\text{Ex}$ Intrinsically safe • Zone 20

### Series KDEX - proximity switches

#### Category 1 Dust $\text{Ex}$ Zone 20

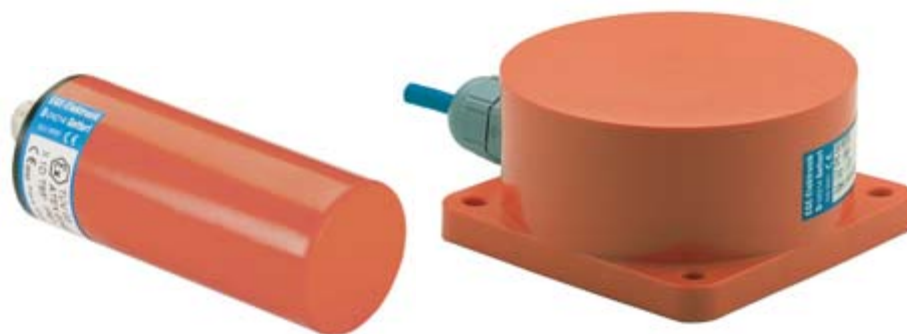

Design	Ø20 mm	Ø34 mm	Ø80 mm
<b>Dimensions</b>			
Installation flush (f) non flush (nb)			
Operating distance [mm] (Adjustable range)	10 nf (1...15)	20 nf (1...30)	55 nf (10...70)
ID-No.	P41313	P41314	P41311
Type	KDEX 020	KDEX 034	KDEX 080
Ambient temperature [°C]		-25...+75	
Ex marking	II 1D Ex ia IIIC T95°C Da IP67		
Certificate No.	TÜV 03 ATEX 2046		
Maximum values		Ci = negligibly small Li = negligibly small Ii = 80 mA Ui = 12.6 V Pi = 252 mW	
Only for the connection to certified intrinsically safe circuits with the following maximum values			
Housing material		PBT	
Protection [EN 60529]		IP 67	
Connection	M12 connector		2 m PVC-cabel 3x0.5 mm <sup>2</sup>
For the connection to amplifiers EGE 903 Ex...			
	<p>1: BN 2: - 3: BU 4: BK</p>		
Accessories	Connecting cable type SLG 3-2 (Z01076)		

## Dust - $\text{Ex}$ Compact model • Zone 22

### Series KGEX - Level controller

Category 3  
Dust  $\text{Ex}$  Zone 22

DC 24 V  
PNP switching output



Design	M18x1	M30x1.5	DC PNP • G1	DC PNP • G3/4
Dimensions				
Installation flush (f) non flush (nf)				
Switching point sp (Adjustable range)	5 f (1...7)	10 f (3...15)	-6	-3
Switching output				
ID-No.	P21170	P21171	P21172	P21173
Type	KGEX 018 GSP	KGEX 030 GSP	KGEX 100 GSP	KGEX 107 GSP
Ex marking	II 3D Ex mc IIIC T 80 °C Dc IP 67			
Supply voltage [V]	10...55 DC			
Switching current [mA]	300			
Short circuit proof	•			
Overcurrent release [mA]	800			
Reverse protection	•			
Voltage drop max. [V]	1.5			
Current consumption [mA]	4			
Switching frequency [Hz]	25	25	10	10
Ambient temperature [°C]	-25...+70			
EMC-class	A			
LED display	•			
Housing material	Br-Ni / PPO	Br-Ni / PPO	PTFE	PTFE / AISI 316 Ti FPM
Protection [EN 60529]	IP 67			
Connection	2 m PVC-cable 3x0.5 mm <sup>2</sup>			
Note: Do not use in the presence of conductive dusts				
Note	Fixing nuts are part of delivey			

## - Amplifiers

### Series EGE 903 Ex

Dust

Gas

**Cable break and short circuit monitoring**

**Connection to 3-lead sensors**











Design	EGE 903 Ex...		
Dimensions			
ID-No.	P21141	P21142	P21143
Type	EGE 903 Ex-230	EGE 903 Ex-115	EGE 903 Ex-24
Supply voltage [V]	230 AC +15/-10%	115 AC +15/-10%	24 VDC ±15%
Certificate no.	TÜV 01 ATEX 1663		
Ex marking	Dust: II (1) D [Ex ia Da] IIIC / Gas: II (1) G [Ex ia Ga] IIC		
Maximum values	$U_o = 12.6 \text{ V}$ $I_o = 80 \text{ mA}$ $P_o = 252 \text{ mW}$ $C_o = 270 \text{ nF}$ $L_o = 5.4 \text{ mH}$		
Output	relay / change-over		
Switching voltage max. [V]	250 AC / 24 DC		
Switching current max. [A]	4 AC / 4 DC		
Switching power	$\cos \varphi > 0,7 / L/R < 200 \text{ ms}$		
Ambient temperature [°C]	-20...+60		
Protection [EN 60529]	IP 20		
Connection	terminal screws		
Notes:	<p>The installation of the amplifier has to be executed outside of the hazardous area.</p>		

## Accessories • M12 connector

### System SL

**Finished cable plug housing**  
**Self locking screw plug**  
**Protection IP 67**

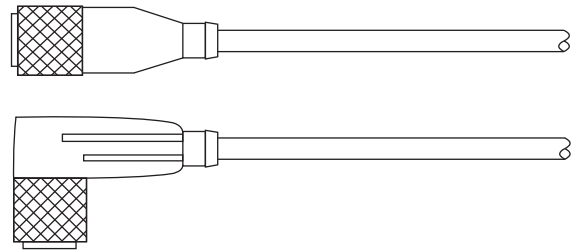

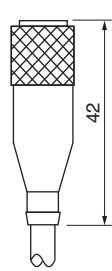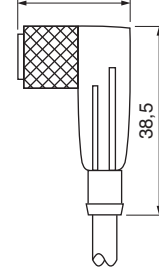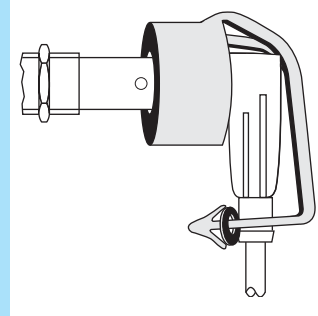Cable plug housing		Pin-assignment		Plug-lock
<p>straight</p>  <p>42</p>	<p>angular</p>  <p>26,5</p> <p>38,5</p>	<p>DC</p>  <p>3-wire</p> <p>1: BN 2: - 3: BU 4: BK</p>	<p>DC</p>  <p>4-wire</p> <p>1: BN 2: WH 3: BU 4: BK</p>	
		<p>DC</p>  <p>5-wire</p> <p>1: BN 2: WH 3: BU 4: BK 5: GY</p>		
		<p>DC</p>  <p>6-wire</p> <p>1: BN 2: WH 3: BU 4: BK 5: GY 6: PK</p>		
<b>SLG...</b>	<b>SLW...</b>	<b>DC</b>		<b>PL-M12</b>

TYPE	ID-NO.	DESIGN
SLG 3-2	Z01076	Cable plug housing straight, 2 m cable 3x0.34 mm <sup>2</sup> max. 250 V / 4 A
SLG 3-5	Z01077	Cable plug housing straight, 5 m cable 3x0.34 mm <sup>2</sup> max. 250 V / 4 A
SLW 3-2	Z01078	Cable plug housing angular, 2 m cable 3x0.34 mm <sup>2</sup> max. 250 V / 4 A
SLW 3-5	Z01079	Cable plug housing angular, 5 m cable 3x0.34 mm <sup>2</sup> max. 250 V / 4 A
SLW 3-2-LED	Z00052	Cable plug housing angular, 2 m cable 3x0.34 mm <sup>2</sup> max. 250 V / 4 A PNP with LED
SLG 4-2	Z00445	Cable plug housing straight, 2 m cable 4x0.25 mm <sup>2</sup> max. 250 V / 4 A
SLG 4-5	Z00449	Cable plug housing straight, 5 m cable 4x0.25 mm <sup>2</sup> max. 250 V / 4 A
SLW 4-2	Z00446	Cable plug housing angular, 2 m cable 4x0.25 mm <sup>2</sup> max. 250 V / 4 A
SLW 4-5	Z00450	Cable plug housing angular, 5 m cable 4x0.25 mm <sup>2</sup> max. 250 V / 4 A
SLW 4-2-LED	Z01157	Cable plug housing angular, 2 m cable 4x0.25 mm <sup>2</sup> max. 250 V / 4 A PNP with LED
SLG 5-2	Z01150	Cable plug housing straight, 2 m cable 5x0.34 mm <sup>2</sup> max. 60 V / 2 A
SLW 5-2	Z01151	Cable plug housing angular, 2 m cable 5x0.34 mm <sup>2</sup> max. 60 V / 2 A
SLG 6-2	Z01197	Cable plug housing straight, 2 m cable 6x0.25 mm <sup>2</sup> max. 36 V / 2 A
SLW 6-2	Z01198	Cable plug housing angular, 2 m cable 6x0.25 mm <sup>2</sup> max. 36 V / 2 A
PL-M12	Z01182	Plug-lock for sensors in Ex areas

### DATA

Thread	M12x1	Contact resistance	≤ 5 mΩ
Material	PVC	Insulation resistance	>10 <sup>9</sup>
Protection	IP 67	Testing voltage	2.0 KV eff. / 5 and 6 pol. 1.5 KV eff.
Temperature range	-25...+80 °C		

### Note

Sensors with NC output are connected to 4 pole cable plug housings. In this case, the break output is connected to the white lead (connection 2).

## Accessories • Mounting accessories

### Lock nuts, brass-nickel - plated

ID-NO.	Z00106	Z00107	Z00114	Z00109	Z00110
Nut thickness [mm]	4	4	4	5	5
Thread	M12x1	M18x1	M22x1	M30x1.5	M38x1.5
Spanner size	17	24	27	36	50

### Lock nuts, special steel

ID-NO.	Z01098	Z00112	Z00113	Z00115
Nut thickness [mm]	4	4	4	5
Thread	M8x1	M12x1	M18x1	M30x1.5
Spanner size	13	17	24	36




### Lock nuts, plastics

ID-NO.	Z00180	Z00120	Z00117	Z00118	Z00119	Z01092	Z01052
Nut thickness [mm]	6	8	4	5	5,5	8	8
Thread	M14x1	M30x1.5	M12x1	M18x1	M30x1.5	G3/4	G1
Spanner size	22	41	17	24	36	41	50
Material	PTFE	PTFE	PPE	PPE	PPE	PTFE	PTFE

### Central screw, polyamide

Z00104	M12, length 70 mm, hexagon socket 10 mm, material PA
Z00105	M16, length 90 mm, hexagon socket 14 mm, material PA

### MOUNTING CLAMPS

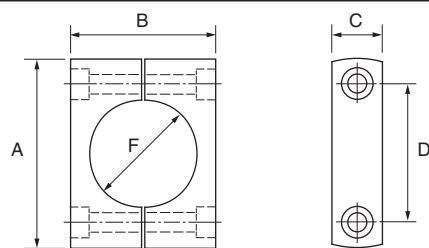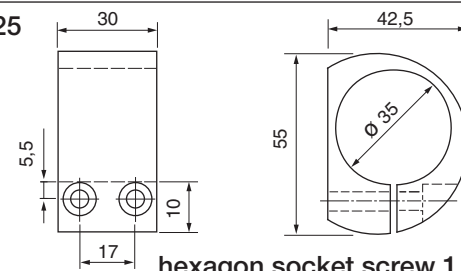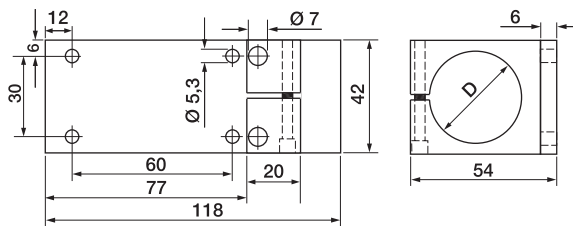TYPE	ID-NO.	DIMENSIONS	DESIGN																		
KLS 20 KLS 34	Ø 20 Ø 34	Z00100 Z00102	Clamps of PA, for smooth-bodied switches																		
		 <p>E: hexagon socket screw 1.4305</p>	<table border="1"> <thead> <tr> <th>F</th> <th>Ø 20</th> <th>Ø 34</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>47</td> <td>61</td> </tr> <tr> <td>B</td> <td>30</td> <td>47</td> </tr> <tr> <td>C</td> <td>17</td> <td>15</td> </tr> <tr> <td>D</td> <td>32</td> <td>45</td> </tr> <tr> <td>E</td> <td>M5x30</td> <td>M5x50</td> </tr> </tbody> </table>	F	Ø 20	Ø 34	A	47	61	B	30	47	C	17	15	D	32	45	E	M5x30	M5x50
F	Ø 20	Ø 34																			
A	47	61																			
B	30	47																			
C	17	15																			
D	32	45																			
E	M5x30	M5x50																			
KLB 35	Ø 35	Z00125	Clamp of PTFE (Teflon), for smooth-bodied switches hexagon socket screw M5x40																		
		 <p>hexagon socket screw 1.4571</p>																			
KBM 025 KBM 030 KBM 035	Ø 25 Ø 30 Ø 35	Z01189 Z01188 Z01187	Mounting clamp of Aluminium																		
			<table border="1"> <thead> <tr> <th>Type</th> <th>D</th> </tr> </thead> <tbody> <tr> <td>KBM 025</td> <td>Ø 25</td> </tr> <tr> <td>KBM 030</td> <td>Ø 30</td> </tr> <tr> <td>KBM 035</td> <td>Ø 35</td> </tr> </tbody> </table>	Type	D	KBM 025	Ø 25	KBM 030	Ø 30	KBM 035	Ø 35										
Type	D																				
KBM 025	Ø 25																				
KBM 030	Ø 30																				
KBM 035	Ø 35																				

## Accessories • Cable

TYPE	ID.-NO.	MATERIAL/SHEATH	$\varnothing_A$ [mm]*	WIRE SPECIFICATION	COLOUR
PVC205	Z01061	PVC, grey	5.2	2x0.5 mm <sup>2</sup>	BU, BN
PVC205B	Z01062	PVC, blue	4.4	2x0.5 mm <sup>2</sup>	BU, BN
PVC275	Z01086	PVC, grey	6.0	2x0.75 mm <sup>2</sup>	BU, BN
PVC275BS	Z01108	PVC, blue	6.3	2x0.75 mm <sup>2</sup> shielded	numbered cable
PVC334	Z01109	PVC, grey	4.5	3x0.34 mm <sup>2</sup>	BU, BN, BK
PVC305E	Z01064	PVC, grey	5.2	3x0.5 mm <sup>2</sup>	BU, BN, GN/YE
PVC305	Z01063	PVC, grey	5.2	3x0.5 mm <sup>2</sup>	BU, BN, BK
PVC375	Z01065	PVC, grey	6.0	3x0.75 mm <sup>2</sup>	numbered cable
PVC375E	Z01111	PVC, grey	6.0	3x0.75 mm <sup>2</sup>	BU, BN,GN/YE
PVC425	Z01110	PVC, grey	4.3	4x0.25 mm <sup>2</sup>	BU, BN, BK, WH
PVC434	Z01066	PVC, grey	4.5	4x0.34 mm <sup>2</sup>	BU, BN, BK, WH
PVC405	Z01067	PVC, grey	5.5	4x0.5 mm <sup>2</sup>	BU, BN, BK, WH
PVC475E	Z01113	PVC, grey	6.5	4x0.75 mm <sup>2</sup>	BU, BN, BK, GN/YE
PVC475BS	Z01114	PVC, blue	7.3	4x0.75 mm <sup>2</sup> shielded	numbered cable
PVC505	Z01116	PVC, grey	5.8	5x0.5 mm <sup>2</sup>	BU, BN, WH, BK, GY
PVC705	Z01117	PVC, grey	6.6	7x0.5 mm <sup>2</sup>	BU, BN, WH, GN/YE, GY, PK
PUR334	Z01156	PUR, grey	5.0	3x0.34 mm <sup>2</sup>	BU, BN, BK
PUR375	Z01068	PUR, black	6.0	3x0.75 mm <sup>2</sup> -40°C	BU, BN, BK
PUR425S	Z01069	PUR, grey	5.0	4x0.25 mm <sup>2</sup> shielded	BU, BN, WH, BK
PUR425BS	Z01070	PUR, blue	5.0	4x0.25 mm <sup>2</sup> shielded	BU, BN, WH, BK
PUR405	Z01112	PUR, black	5.0	4x0.5 mm <sup>2</sup>	BU, BN, WH, BK
PUR475SE	Z01118	PUR, grey	9.0	4x0.75 mm <sup>2</sup> shielded	numbered cable
PUR410E	Z01119	PUR, orange	8.0	4x1.0 mm <sup>2</sup>	BU, BN, BK, GN/YE
FEP375S	Z01126	FEP, red	5.0	3x0.75 mm <sup>2</sup> shielded	BU, BN, BK
FEP334	Z01071	FEP, red	3.8	3x0.34 mm <sup>2</sup>	BU, BN, BK
FEP425S	Z01073	FEP, red	4.1	4x0.25 mm <sup>2</sup> shielded	BU, BN, BK, WH
FEP425	Z01072	FEP, red	3.7	4x0.25 mm <sup>2</sup>	BU, BN, BK, WH
FEP425BS	Z01125	FEP, blue	4.1	4x0.25 mm <sup>2</sup> shielded	BU, BN, BK, WH
FEP375	Z01165	FEP, red	4.2	3x0.75 mm <sup>2</sup>	BU, BN, GN/YE
Silikon375E	Z01121	Silicone, red	6.0	3x0.75 mm <sup>2</sup>	BU, BN, GN/YE
Silikon475E	Z01122	Silicone, red	6.3	4x0.75 mm <sup>2</sup>	BU, BN, BK, GN/YE
Silikon475SE	Z01115	Silicone, red	8.8	4x0.75 mm <sup>2</sup> shielded	BU, BN, BK, GN/YE
Silikon305	Z01143	Silicone, red	5.5	3x0.5 mm <sup>2</sup>	BU, BN, BK
PVC705SE	Z01123	PVC-transparent	9.2	7x0.5 mm <sup>2</sup> shielded	numbered cable, GN/YE

\*Tolerance of diameter  $\pm 0,4$  mm



## A selection

### Flow sensors

- Electronical monitoring of flow
- Lubrication monitoring
- Measuring range 1 ml/min...100 l/min
- Detection range 1...300 cm/s
- Reaction time 0.5 s

### Level sensors

- For level monitoring  $-230...+230\text{ }^{\circ}\text{C}$
- Steam proof at a pressure of up to 30 bar
- For hot motor oil
- For liquid nitrogen
- For chemically aggressive media

### Ultrasonic

- Switching distance up to 5000 mm
- Level monitoring
- Watertight housing
- Teach-in functions

### Pressure sensors

- Compact model with digital display
- Monitoring in pipes and containers
- Pressure up to 16 bar
- Level up to 10 m ( $\pm 1\text{ cm}$ )
- Programmable

### Temperature sensors

- Compact model with digital display
- Monitoring in pipes and containers
- Temperature  $-40...+120\text{ }^{\circ}\text{C}$  ( $\pm 0,3\text{ }^{\circ}\text{C}$ )
- Pressure up to 100 bar
- Multi use output NO/NC + analog

### Infrared detectors

- Measurement of temperature
- Monitoring of hot media
- Position control



Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54
Астана +7(7172)727-132	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31
Белгород (4722)40-23-64	Кемерово (3842)65-04-62	Новосибирск (383)227-86-73	Ставрополь (8652)20-65-13
Брянск (4832)59-03-52	Киров (8332)68-02-04	Орел (4862)44-53-42	Тверь (4822)63-31-35
Владивосток (423)249-28-31	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Томск (3822)98-41-53
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Тула (4872)74-02-29
Вологда (8172)26-41-59	Курск (4712)77-13-04	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Воронеж (473)204-51-73	Липецк (4742)52-20-81	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Екатеринбург (343)384-55-89	Магнитогорск (3519)55-03-13	Рязань (4912)46-61-64	Уфа (347)229-48-12
Иваново (4932)77-34-06	Москва (495)268-04-70	Самара (846)206-03-16	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Мурманск (8152)59-64-93	Санкт-Петербург (812)309-46-40	Череповец (8202)49-02-64
Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Саратов (845)249-38-78	Ярославль (4852)69-52-93